HYDROTHERM™

- 6 Year Full Warranty
- Suitable for most family's demands
- One of the highest efficiencies on the market

CLEAN GREEN ENERGY

SolarGreen (Aust) Pty Ltd
Ph: 1300 783 427

CLEAN GREEN ENERGY

SolarGreen (Aust) Pty Ltd
Ph: 1300 783 427

CLEAN GREEN ENERGY

SolarGreen (Aust) Pty Ltd
Ph: 1300 783 427

DYNAMIC-SS/X8/OP

HYDROTHERM™

FEATURES & BENEFITS

Hydrotherm's large storage capacity allows for continuous hot water on demand

Exterior casing and storage tank constructed from marine grade stainless steel.

By utilizing the ambient heat of the surrounding air, Hydrotherm is able to deliver a 400% efficiency rating.

The user friendly, programmable display allows for flexible control of heating functions.

Easy to set timer function allow for heating during the day which ensures the maximum efficiency of the system.

Noise dampening technology, quiet fan operation and timer functions minimize any potential disturbances.

6 YEAR FULL WARRANTY

Hydrotherm's comprehensive 6 year warranty covers all parts and tank in full, including any labour charges. Have peace of mind that you'll be covered.

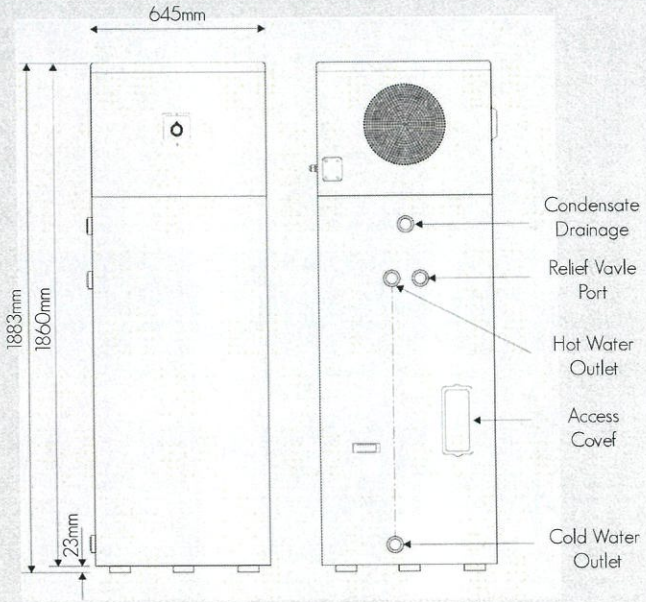

TECHNICAL

Power Supply	240V/Single
Ampere	4 Amp
Input Rating	880V
Compressor	Panasonic Rotary
Refrigerant	R134a
Tank Material	316L SS
Min. Temp. Operation	-5°C
Max. Temp. Operation	40°C
Tank Volume	275L
Tank Recovery	280 minutes
COP	4.25

STC ZONES

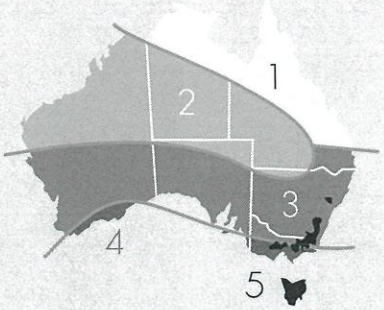

Zone 1 = 24
Zone 2 = 23
Zone 3 = 29
Zone 4 = 30
Zone 5 = 30

benchmark® PRODUCT CERTIFICATION | JAS-ANZ

The Hydrotherm Range is certified for compliance to the following Australian Standards for construction & performance. AS 2712:2007 Solar & Heat Pump Design | AS 3498: 2009 Legionella Control | AS 60335.240 Electrical Safety AS 4020 Potable Water Quality | AS 5125 Heat Pump Performance Test | AS 4692 Tank Heat Loss Test Engineered by: Aquatech Solar Technologies Pty Ltd | ABN 68 136 584 328